



INDOOR ALL-1-ONE SMART LED


[RTV SERIES]

RTV2S RTV2Spro RTV1S

- Provides a large, seamless and bezel-free
- Ultra-wide color range enables more rich
- Peripheral equipment
- No visible stitching
- Highly integrated
- High comfort
- Convenient functions
- Convenient use
- Multiple installation mode
-



Cabinet drawing

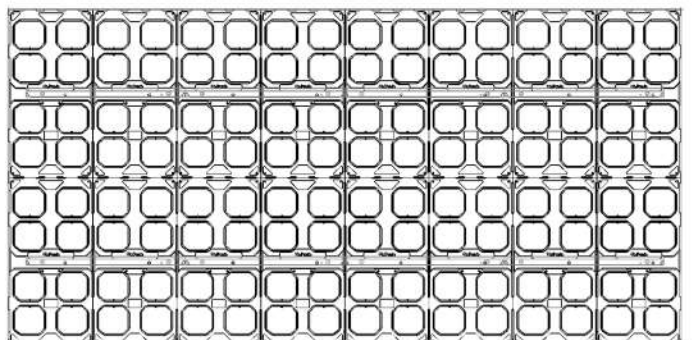

TECHNICAL PARAMETERS

| Parameter | UHD2Spro(I) | UDH1S(I) | UHD1Spro(I) |
|--|--|----------------|----------------|
| Pixel configuration | 3-in-1 SMD1921 | 3-in-1 SMD1515 | 3-in-1 SMD1010 |
| Pitch(mm) | 2.60 | 1.95 | 1.56 |
| Module size(mm)(wxh) | 250x250 | 250x250 | 250x250 |
| Module resolution(wxh) | 96x96 | 128x128 | 160x160 |
| Screen size(mm) (wxh) | 4000x2000x38 | 4000x2000x38 | 3000x1750x38 |
| Screen resolution(wxh) | 1536x768 | 2048x1024 | 1920x1120 |
| Pixel density (pixels/m ²) | 147456 | 262144 | 409600 |
| Screen material | Die-casting Aluminum | | |
| Screen weight (kg) | 180 | 180 | 140 |
| Cabinet serviceability | Intelligent front service | | |
| Ingress protection (front/rear) | IP50 | | |
| Brightness | 200 | | |
| Brightness control | 256 levels Manual/Automatic | | |
| Contrast ratio | 6000 : 1 | | |
| Color | 4.4 Trillion | | |
| Grayscale | 16 bit | | |
| Frame rate(Hz) | 50&60 | | |
| Refresh rate(Hz) | 1920 | | |
| Horizontal viewing angle(°) | 140 | 160 | 160 |
| Vertical viewing angle(°) | 140 | 160 | 160 |
| Max power consumption(w) | ≤ 2000 | ≤ 2000 | ≤ 1500 |
| Average power consumption(w) | ≤ 660 | ≤ 660 | ≤ 500 |
| Drive mode | Constant current drive | | |
| Operation temperature(°C) | -10 to 50 | | |
| Operation humidity(RH) | 10%-90% no condensation | | |
| Input signal | DVI/HDMI/VGA/SDI/DP/AV/S-Video, etc. | | |
| Data interconnection | Network cable(L ≤ 100m), Multi-mode fiber (L ≤ 300m), Single mode fiber (L ≤ 15km) | | |
| Lifetime(hrs) | 100000 | | |



***All specifications are subjected to change without notice

"We are professional in audio visual systems"



CHINAVUT MARKETING CO., LTD.

63, 65, 67 Soi Rungruang , Ratchadapisek Rd., Samsaennok , Huay-Kwang Bangkok 10320
Tel : 0-2694-3000 , Email : info@chinavut.com , www.chinavut.com

Available from :

